



Sinexcel

Power Quality

Energy Efficiency

Active Harmonic Filter

Modular
Solution

Harmonic Mitigation

NONLINEAR LOADS

Different compensation model for different loads

NONLINEAR LOADS

INDUSTRIAL EQUIPMENT

Induction furnaces,
static converters,VFD,
welding machines

OFFICE EQUIPMENT

Computers, servers, printers

HOUSEHOLD APPLIANCES

Fluorescent lightings, TV light,
dimmers, microwave ovens.


UNINTERRUPTIBLE POWER SUPPLIES (UPS)

WHY HARMONIC HURT YOUR SYSTEM?


Higher harmonic current would lead to capacitors' inner swelling, oil spilling and fire risk, severe discharge, flashover and overheat, resulting in over-current and over-voltage, accelerating the aging of the capacitor dielectric, lower safety levels of installations , which cause the unnecessary financial losses .

Higher harmonic orders cause more serious distortion on the grid voltage and current, which will increase the transformer copper and iron losses or load imbalance.

Affect the equipment efficiency and occupy unnecessary grid capacity. Overheating of equipment and shortening the lifetime.

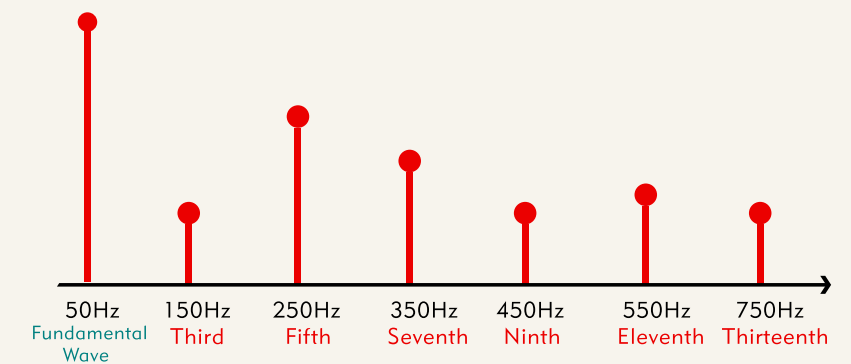

Electrical network with poor power quality results in financial loss and safety concerns. Good power quality not only improves the efficiency of the energy by decreasing the loss of electrical equipment, but also guarantees that the power system could support stable and healthy operation. It becomes more and more convenient for us both in daily life and industry because of fast developing technology, which is also accompanied with the development of non-linear loads .

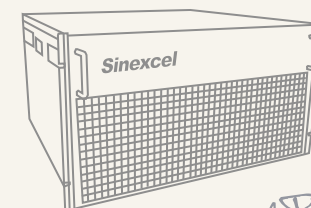


ADT Inverter Base

AHF WORKING PRINCIPLE

Optimize your reactive power compensation efficiency



External CT detect the load current, DSP as CPU has advanced logic control arithmetic, could fast track the instruction current, divides the load current into active power and reactive power by using the intelligent FFT, and calculates the harmonic content rapidly and accurately. Then sends PWM signal to internal IGBT's driver board to control IGBT on and off at 20KHZ frequency. Finally generates opposite phase compensation current on inverter induction, at the same time CT also detects the output current and negative feedback goes to DSP. Then DSP proceeds the next logical control to achieve more accurate and stable system.

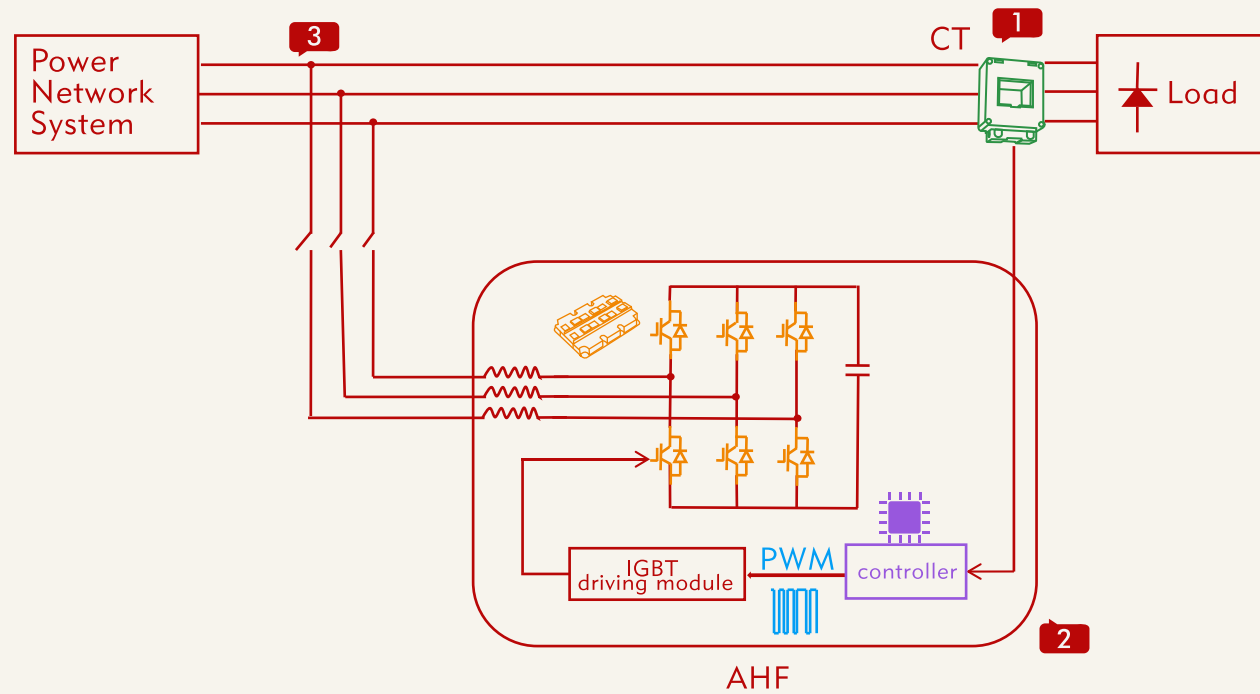


LOAD


AHF

SOURCE

SPECTRUM

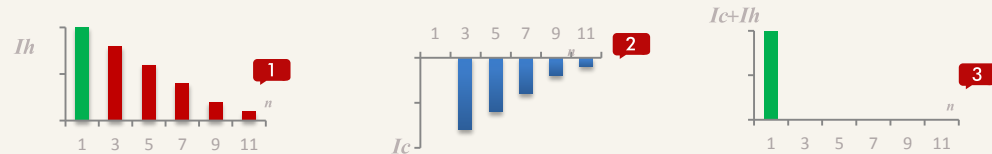


WAVEFORM

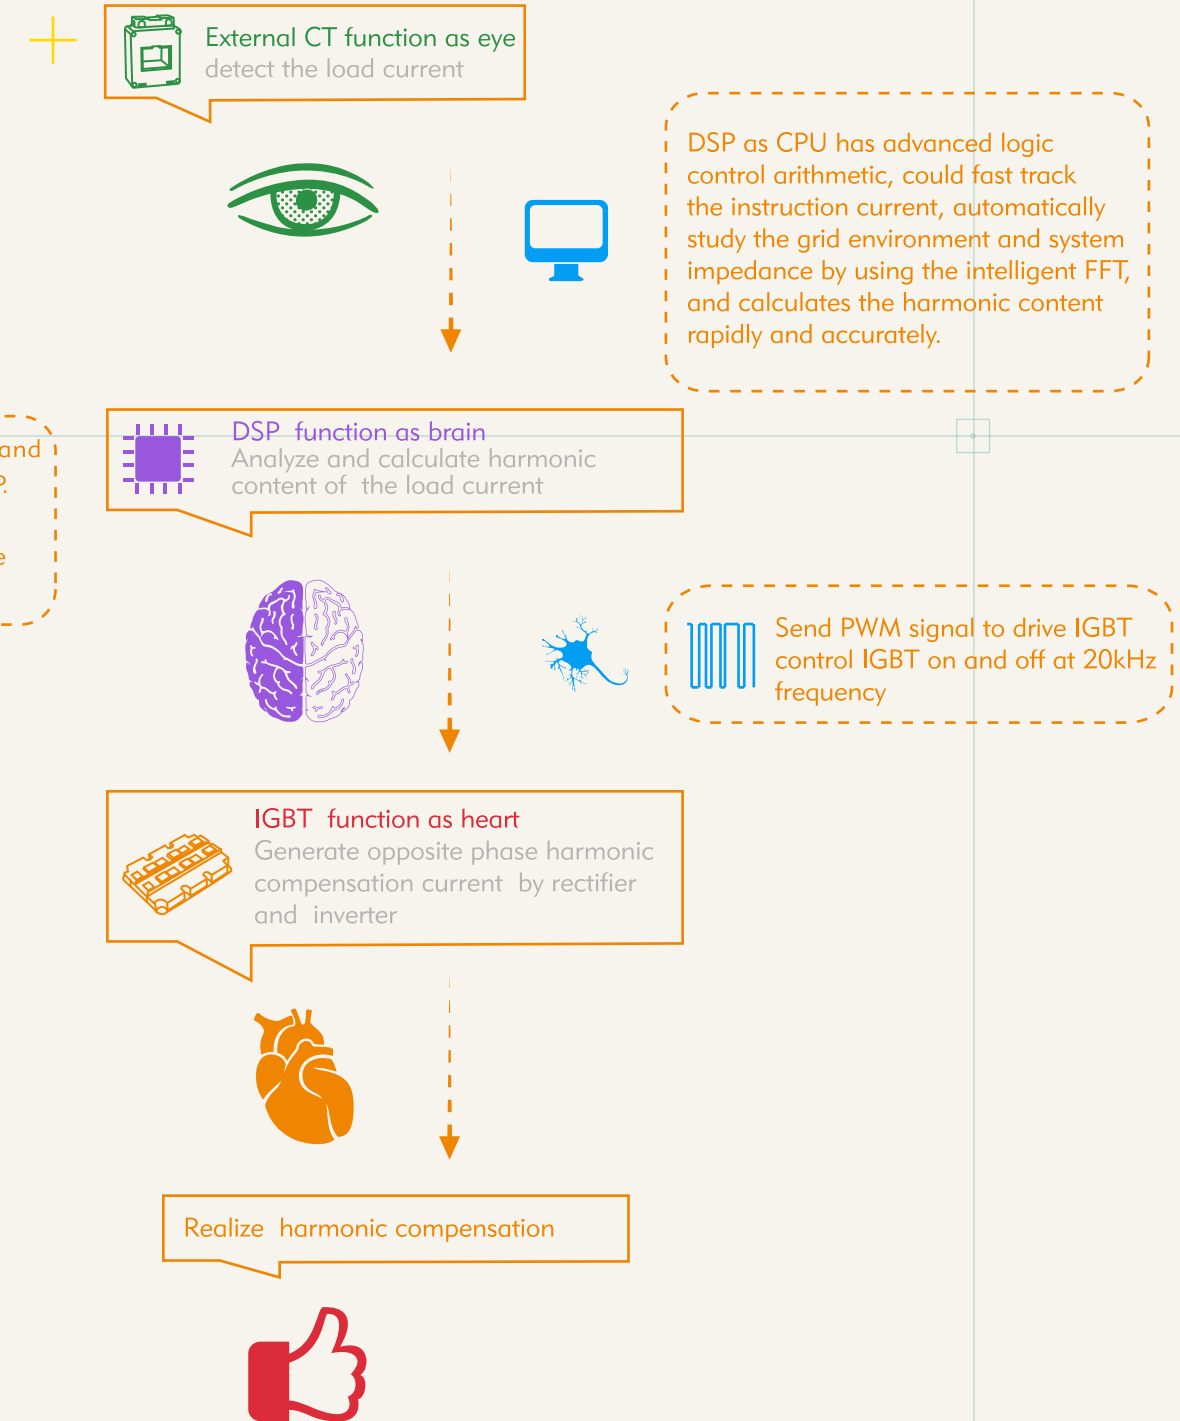

UNDERSTAND HOW AHF COMPENSATE HARMONIC

Optimize your reactive power compensation efficiency

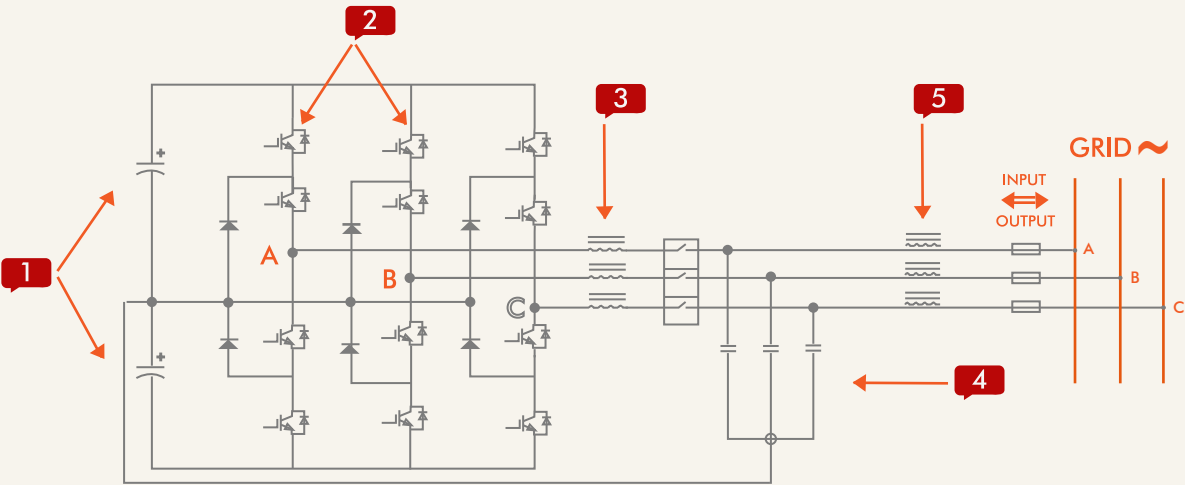


DC BUS CAPACITOR

AC to DC rectifier storage

IGBT


Controlled by DSP software algorithm, IGBT on-off timing selection and length could control inverter to generate a harmonic current.

IGBT generates square wave, it's outline is like sinusoid.

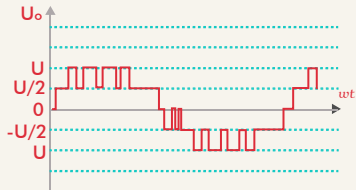

INVERTER INDUCTION


The square wave will convert into triangular wave, which is more like sinusoid after inverter inductor.

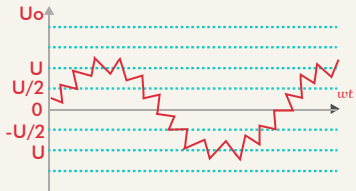

LCL FILTER CIRCUIT

LC FILTER CIRCUIT

LC filter circuit filter out impurities of the harmonic. High frequency inductor The rest of high frequency harmonic will be filtered by the high frequency inductor.

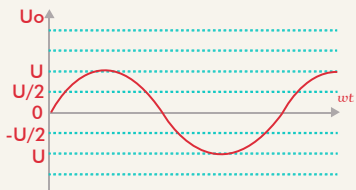

HIGH FREQUENCY INDUCTOR

Both for filtering. The combination of LC filter circuit and high frequency inductor are called LCL filter circuit

KEY FEATURES AND BENEFITS

Impressive compensation effect of AHF

MODULAR DESIGN

Ultra-compact design, wall and rack mount installation, easy to use in new or exiting switch room upgraded

Module structure with highest reliability of system

3P4W and 3P3W adapted by same modules, same harmonic mitigation capability

INTELLIGENT FFT

Unique intelligent FFT algorithm automatically study the electrical system impedance, to prevent system from resonance, high system reliability

Real time electrical system resonance monitor and management

GRAPHICAL USER INTERFACE




Module 4.3 inch HMI, cabinet 7 inch HMI central

Display electrical system voltage, current, frequency, before and after THDi, Apparent/Active/Reactive power, etc

Display before and after waveform, spectrum in same page with clearly comparison


MAINTENANCE FREE DESIGN

Independent air flue, separate electronic components from air flue. Free of dust cleaning maintenance requirement, improve product reliability

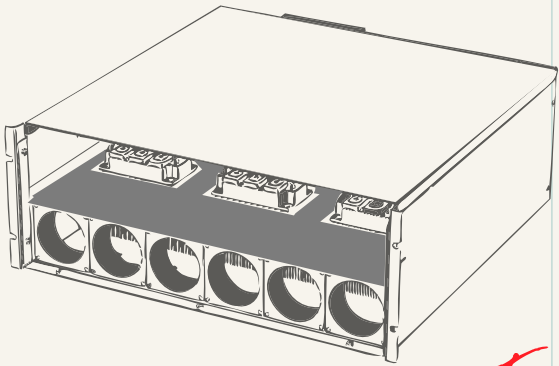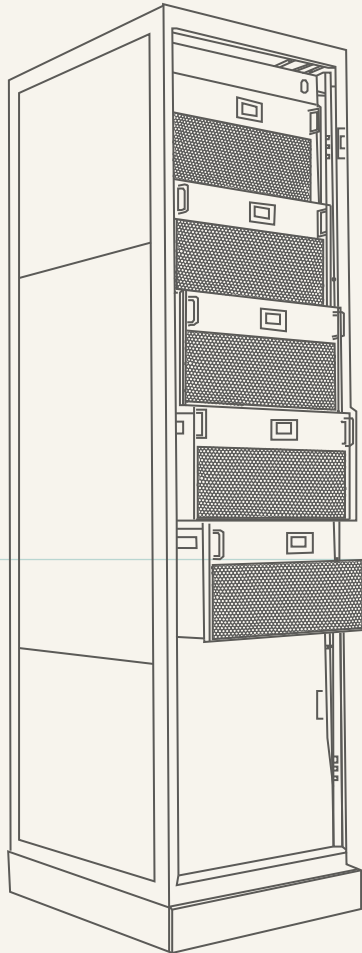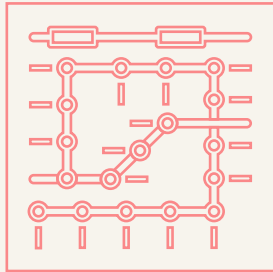

AHF Cabinet


POWER INVERTER

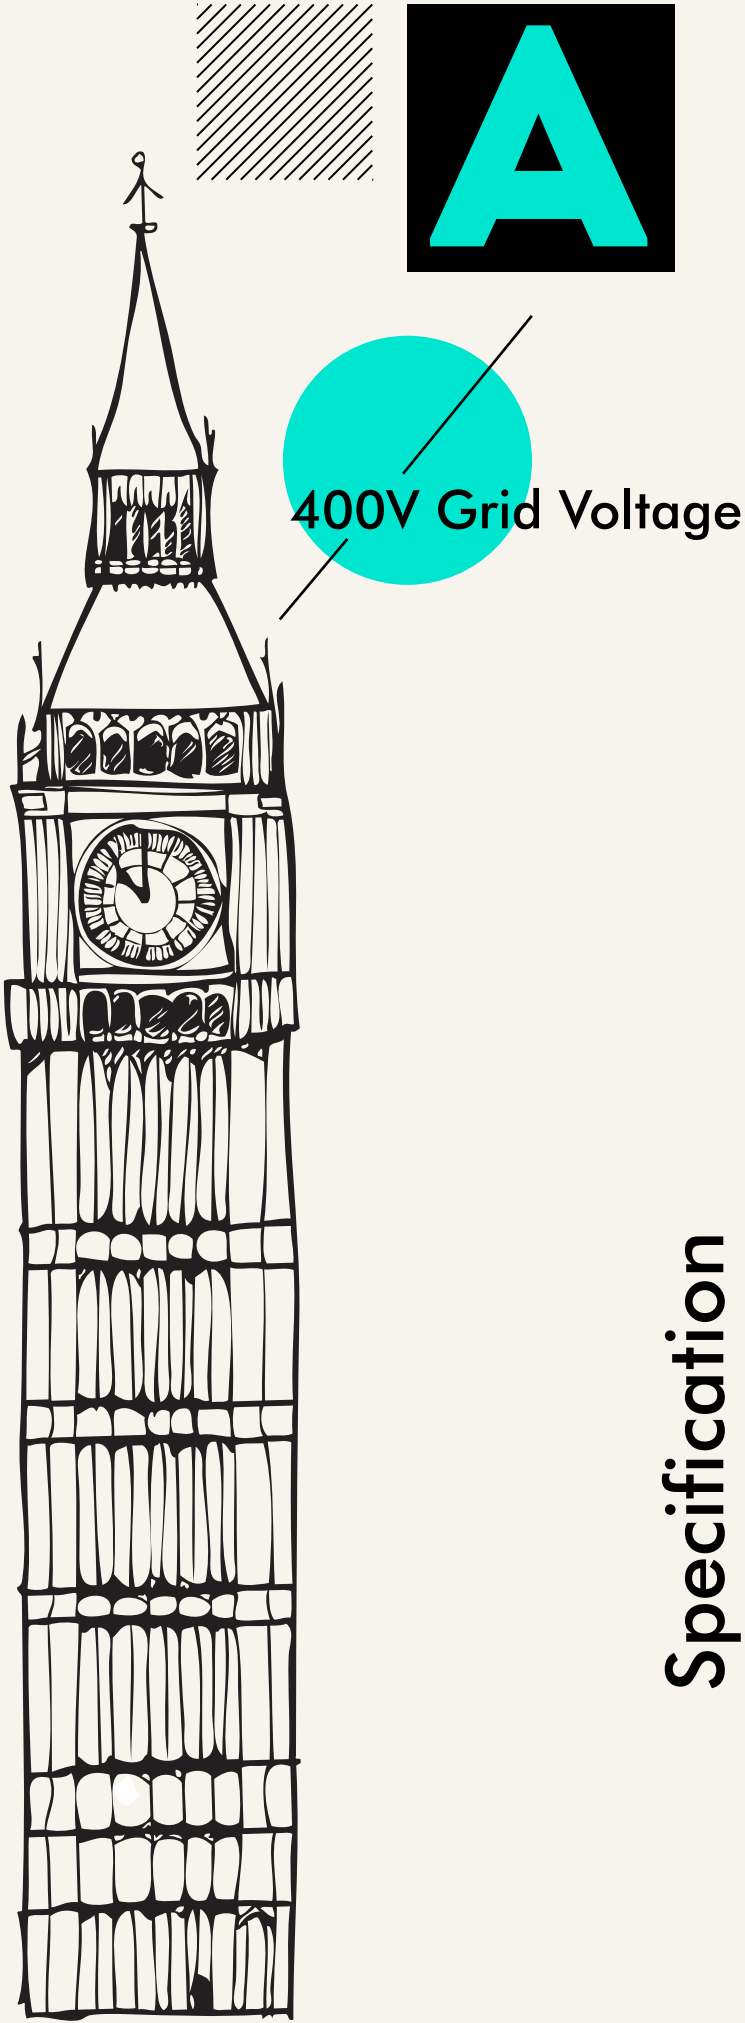

Items
Rated input
Power grid frequency
Parallel quantities
Efficiency
Power grid structure
CT
Circuit topology
Rated capacity
Harmonic compensation
Reactive power compensation
Unbalance compensation
Control algorithm
Operation mode
Filtering range
Filtering order
Filtering degree
Filter performance
Reaction time
Overall response time
Target power factor
Switching frequency
Cooling air requirement
Noise level
Communications ports
Communications protocols
Module display interface
Protection functions
monitoring alarm
Fault alarm
Mounting type
Dimensions (W x D x H) (mm³)
Net weight
Color
Altitude
Ambient temperature
Relative humidity
Protection class
Qualifications
Standards compliance

400V				
Sinexcel AHF 005/010/015	Sinexcel AHF 025/035	Sinexcel AHF 050/060	Sinexcel AHF075/ 100	Sinexcel AHF 150
System parameters				
380V/415V(228V~456V)				
50/60Hz(range: 45Hz~62.5Hz)	50/60Hz(range: 45Hz~ 62Hz)			
unlimited				
≥97%				
3P3W, 3P4W				
50/5~10000/5	150/5 ~ 10,000/5			
3-level				
Performance indicators				
5/10/15A	25A/35A	50A/60A	75A/100A	150A
Available				
Available				
Available				
FFT,Intelligent FFT, and instantaneous reactive power				
12 combination, set up priority				
2 nd to 61 th orders	2 nd to 50 th orders			
2 to 61 orders	2 to 50 orders			
2 to 61 orders	2 to 50 orders			
>95%				
<15μs	<50μs			
5ms	<5ms			
Adjustable from -1 to +1				
90KHz	average 20kHz,maximum 35kHz			
44L/Sec	75L/Sec	151L/Sec	300L/Sec	405L/Sec
<55dB	<56dB			
Communications and monitoring capabilities				
RS485	RS485, and Ethernet port			
Modbus	Modbus (RTU)			
WIFI display	4.3-inch HMI (mudule), 7-inch HMI(central monitor), LED			
over-voltage protection, under-voltage protection, short-circuit protection, inverter bridge inverse protection, over-compensation protection, and so on				
Available				
	Available, at most 500 alarm records			
Mechanical properties				
Wall-mounted/Rack-mounted	Wall-mounted/Rack-mounted/Cabinet			
400*325*44.5(Rack-mounted) 400*44.5*325(Wall-mounted)	440*490*150 (Rack-mounted) 440*150*470 (Wall- mounted)	440*590*190 (Rack-mounted) 440*190*610 (Wall-mounted)	500*600*190/440*600*230 (Rack-mounted) 500*190*584 /440*234*625 (Wall- mounted)	500*560*269 (Rack-mounted) 500*286*557 (Wall-mounted)
4.98kg	18kg	35kg	36kg	48kg
Black/gray/blue/orange/red (sand blast)	Black			
Environment requirements				
≤1500 m; Between 1500 m to 4000 m, according to GB/T3859.2, the power decreases by 1% for every additional 100 m.				
-10℃~40℃ (may derate capacity if ambient temperature exceeds 45℃)				
5% to 95%, non-condensing				
IP20				
Related qualifications and standards				
CE, IEEE 61000,				
IEEE519、ER G5/4				


PERFECT



North America
& 690V Grid voltage

Specification

Items	480V	600V	690V
	SinexcelAHF 25/35/50/60/75/90(USA)	SinexcelAHF 25/35/50/60/75/90(Canada	SinexcelAHF 25/35/50/60/75/90
System parameters)			
Rated input	480V(384V~552V)	600V(420V ~690V)	690V(483V ~ 793V)
Power grid frequency	50/60Hz(range: 45Hz~62Hz)		
Parallel quantities	unlimited		
Efficiency	≥97%		
Power grid structure	3P3W, 3P4W		
CT	150/5 ~ 10,000/5		
Circuit topology	3-level		
Performance indicators			
Rated capacity	25/35/50/60/75/90A		
Harmonic compensation	Available		
Reactive power compensation	Available		
Unbalance compensation	Available		
control algorithm	Intelligent FFT,FFT, and instantaneous reactive power algorithm		
Filtering range	2nd to 50th orders		
Filtering order	2 to 50 orders		
Filtering degree	2 to 50 orders		
Filter performance	>95%		
Reaction time	< 50μs		
Overall response time	< 5ms		
Target power factor	Adjustable from -1 to +1		
Switching frequency	20kHz		
Cooling air requirement	359L/Sec		
Noise level	<65dB		
Communications and monitoring capabilities			
Communications ports	RS485, and Ethernet port (RJ45)		
Communications protocols	Modbus (RTU)		
Module display interface	7-inch LCD touch screen(rack-mounted); 4.3-inch LCD touch screen(wall-mounted)		
Protection functions	over-voltage protection, under-voltage protection, short-circuit protection, inverter bridge inverse protection, over-compensation protection, and so on		
monitoring alarm	Available		
Fault alarm	Available, at most 500 alarm records		
Mechanical properties			
Mounting type	Wall-mounted/Rack-mounted		
Dimensions (W x D x H) (mm³)	544*640*250(Rack-mounted) 504*253*640(Wall-mounted)		
Net weight	66kg		
Color	Black		
Environment requirements			
Altitude	≤1500 m; Between 1500 m to 4000 m, according to GB/T3859.2, the power decreases by 1% for every additional 100 m.		
Ambient temperature	-20°C~40°C (may derate capacity if ambient temperature exceeds 45°C)		
Relative humidity	5% to 95%, non-condensing		
Protection class	IP20		
Related qualifications and standards			
Qualifications	CE, cETLus (UL508,CAS C22.2), IEEE 61000		
Standards compliance	IEEE519 , ER G5/4		

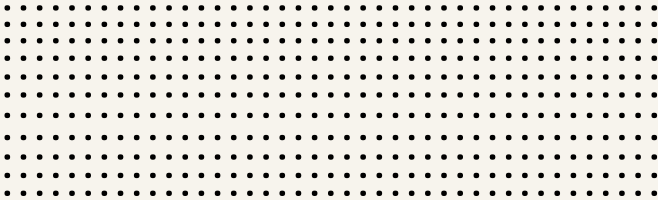



400V



400V



○ 25A/35A wall/rack 440*150*47mm³ 18kg

○ 50A/60A wall/rack 440*190*540 mm³ 35kg
75A wall/rack 500*190*560 mm³ 36kg
100A wall/rack 440*230*600 mm³ 36kg

POWER
E
N



400V



480V
600V
690V




150A wall/rack 500*470*270mm³ 48kg



90A wall/rack 500*590*250mm³ 62kg



400V



5A/10A/15A Rack 400*325*44.5 mm³ 4.98kg




400V




Flexible Engineering Cabinet

- Flexible dimension
600*1000*2200mm3,800*1000*2200mm3,800*800*2200mm3 are available.
- Flexible Capacity
AHF, 25A/35A/50A/60A/75A/100A/150A adapt to cabinet
SVG, 30kvar/50kvar/100kvar adapt to cabinet
AHF, SVG module adapt to cabinet
- Flexible incoming connection
TOP/ Bottom cable entrance
TOP/ Bottom MCCB position




MONITORING

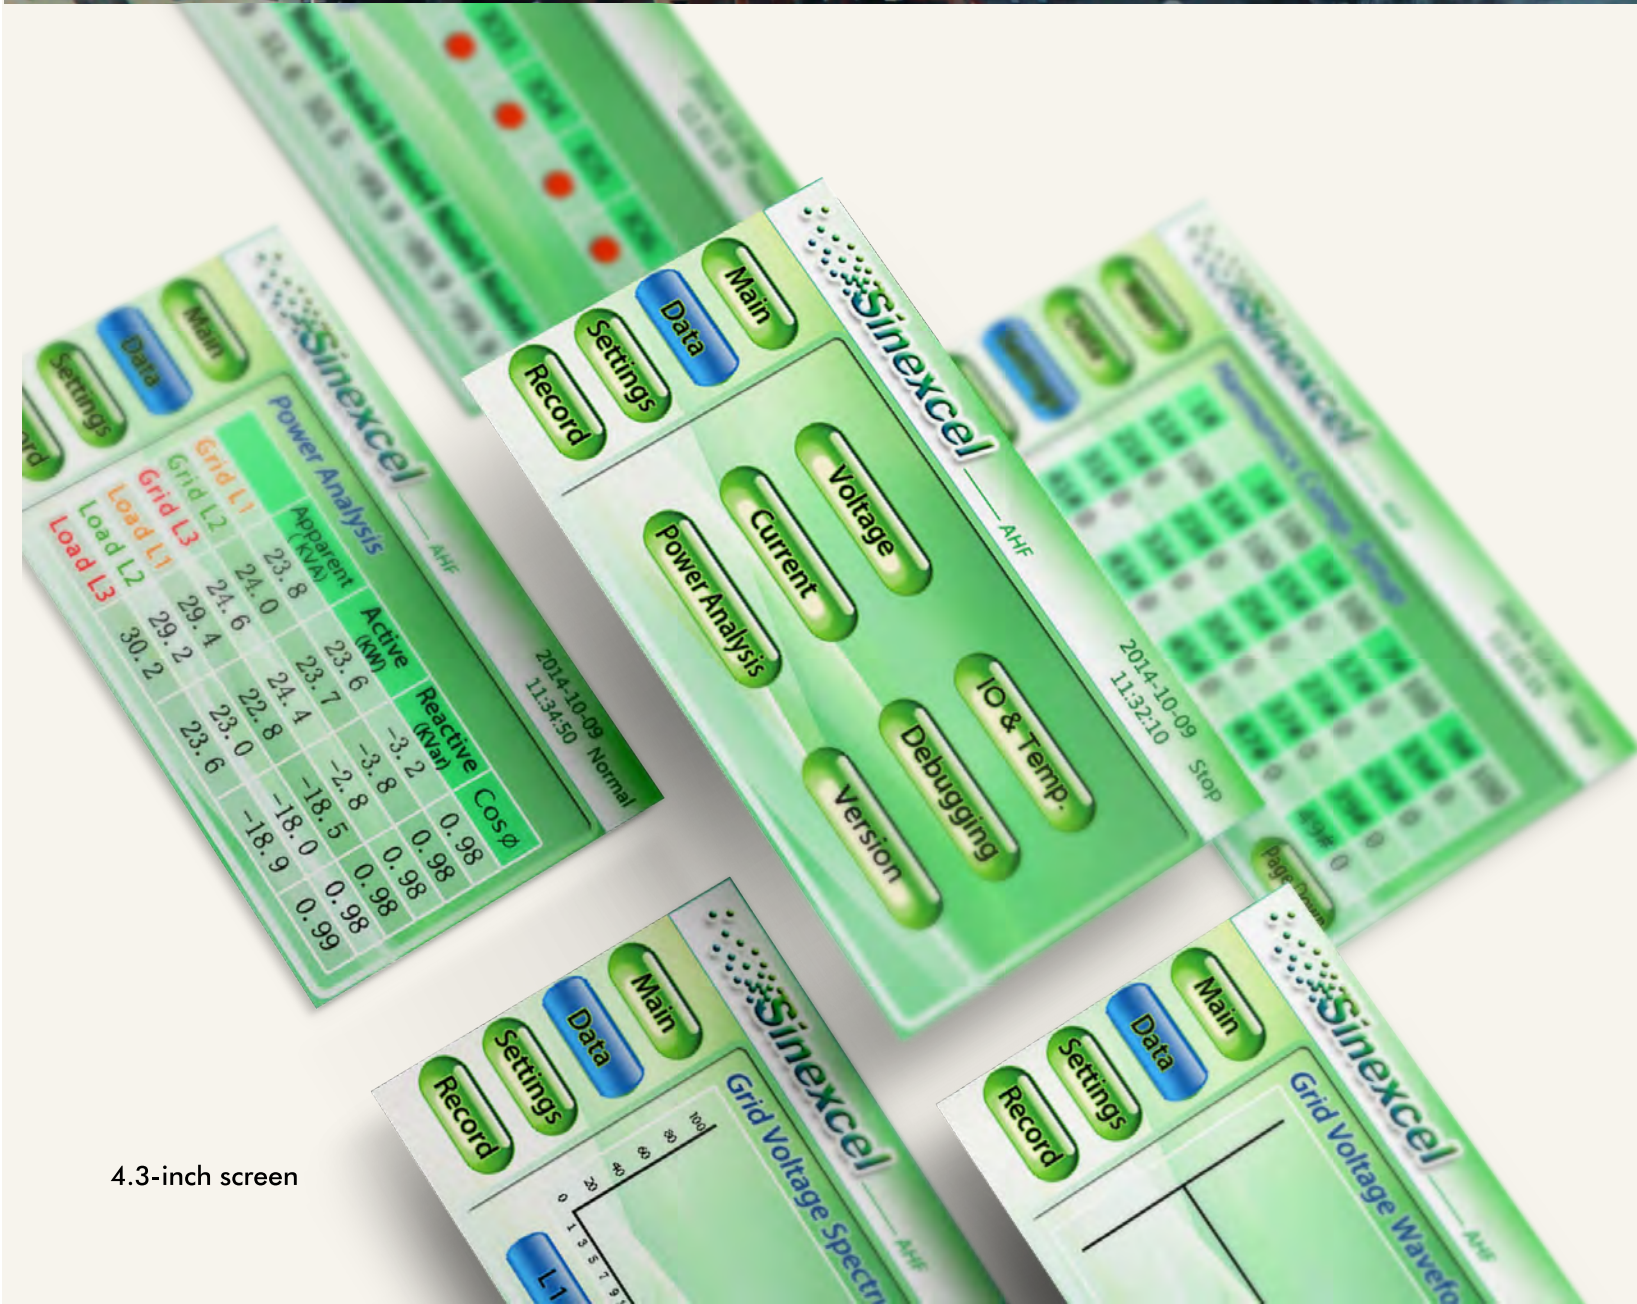


4.3-inch screen





Centralized monitoring System

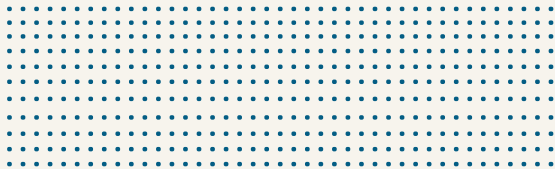


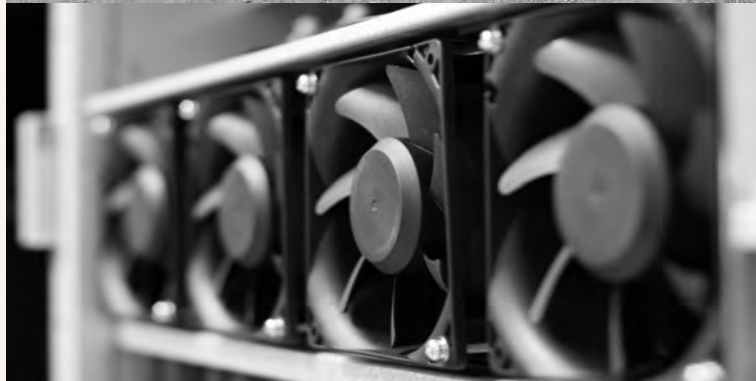


GLOBAL APPLICATION

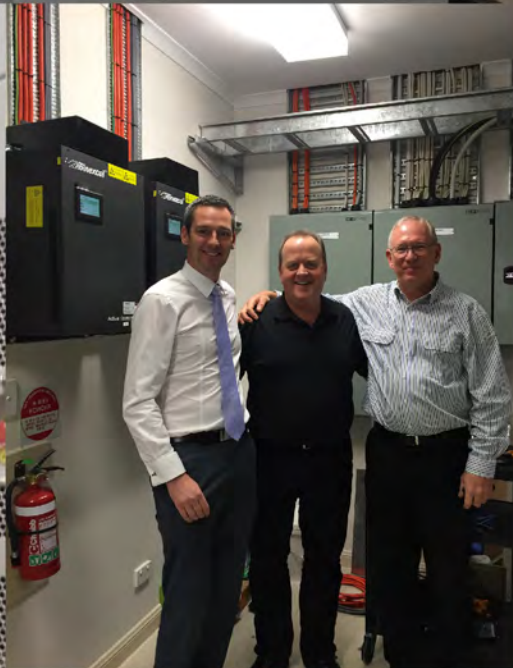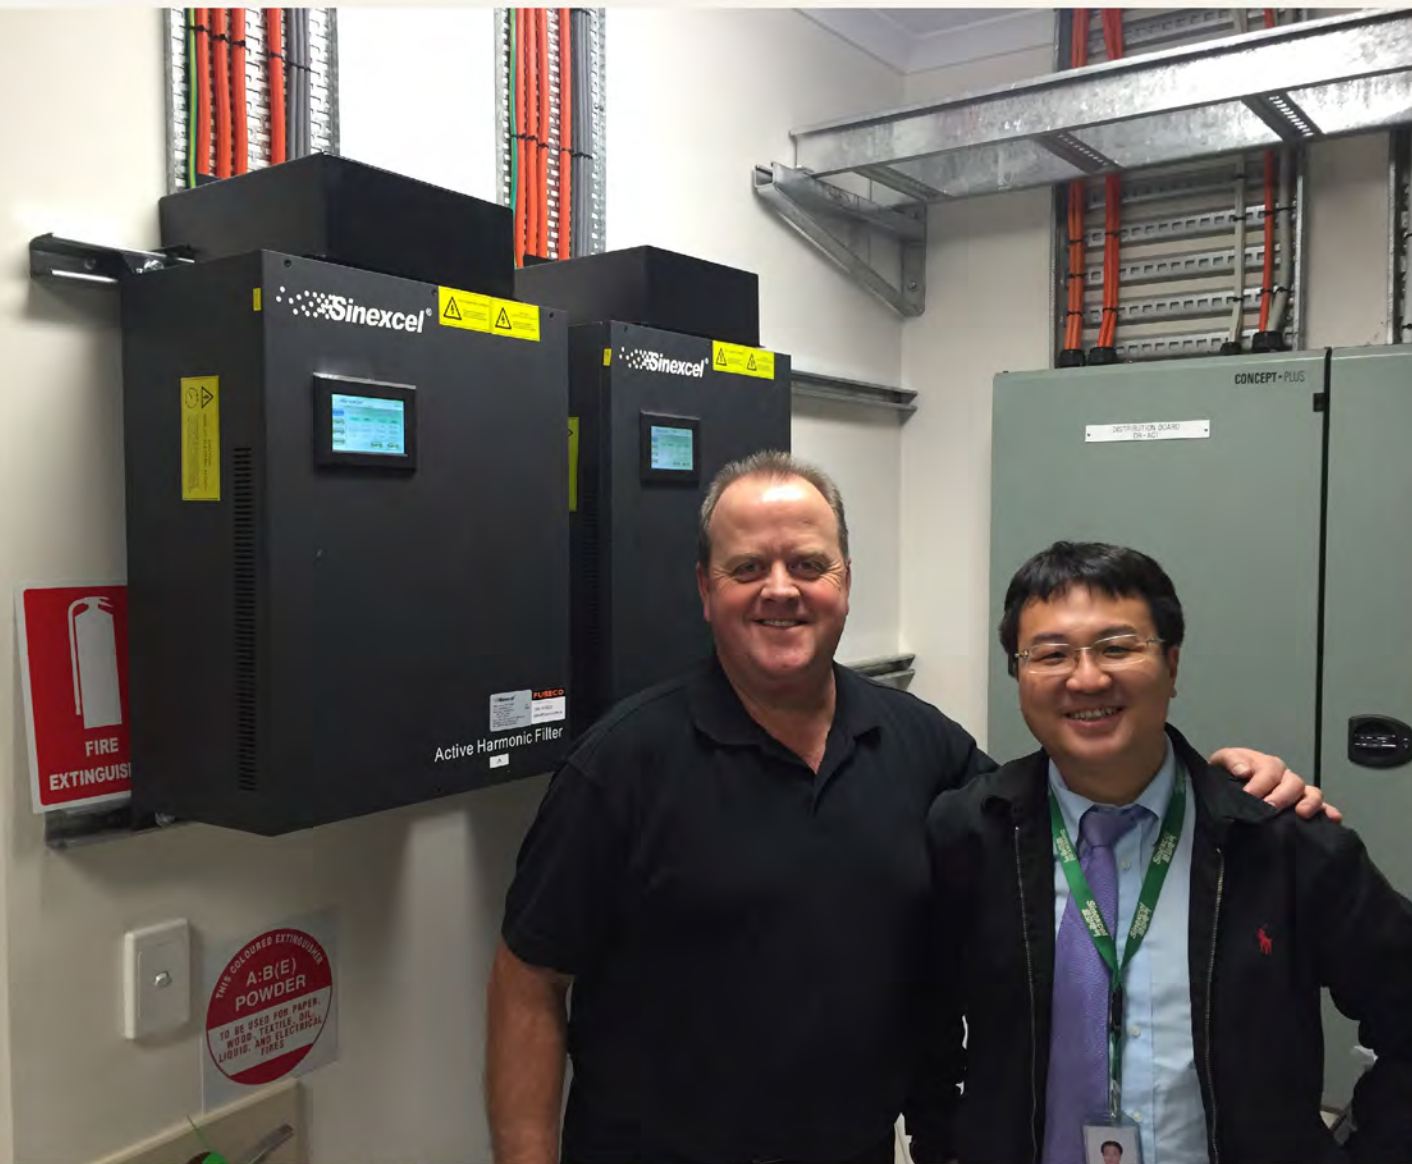

GLOBAL APPLICATION

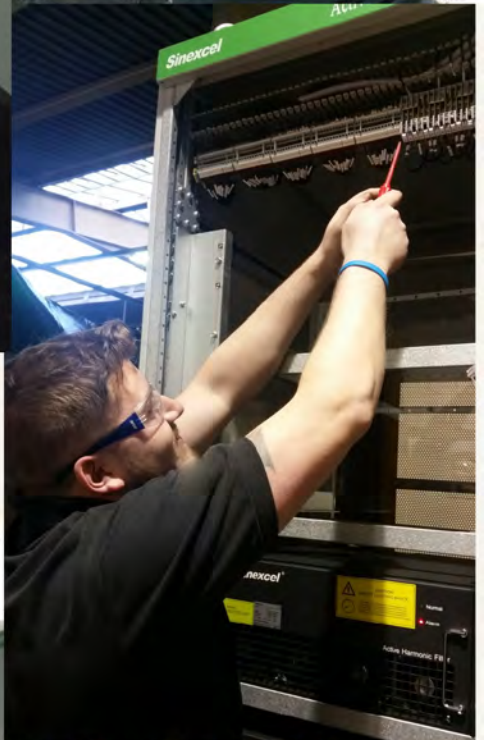


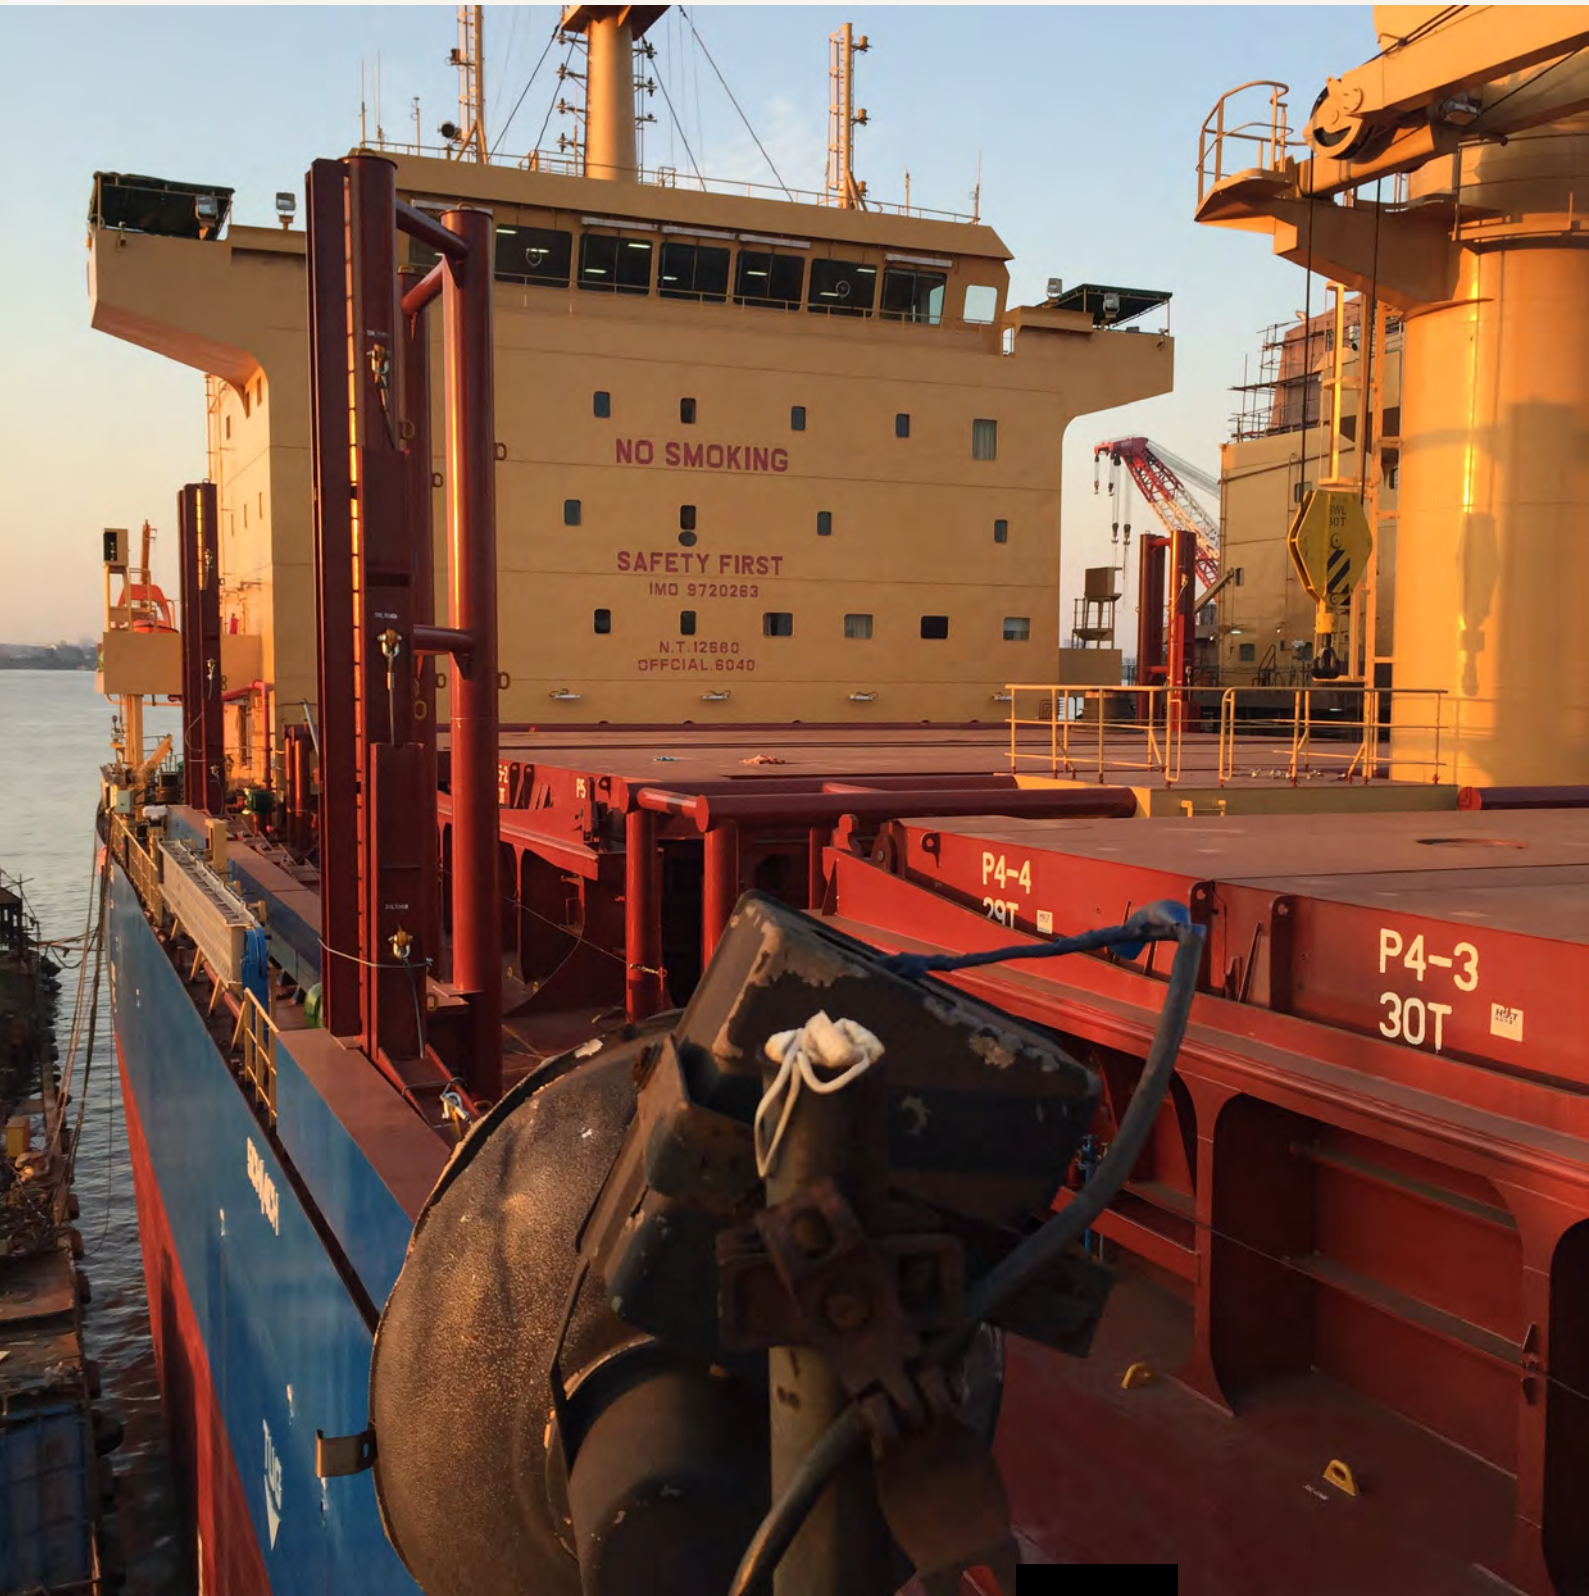

Germany, industrial, AHF, Summit Ship



Saudi Arabia, Industrial, AHF, oil drilling

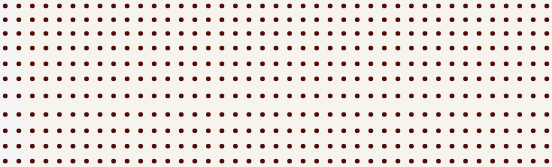



Singapore, commercial, AHF, Marina Bay Financial Center



China, commercial, AHF, Han Show by 5Wanda Group and Franco Dragone Entertainment Group



Australia, industrial, AHF, BHP group




The UK, commercial, AHF, Marks & Spencers-retail





Chile, industrial, food product factory, AHF, Cecinas Lianquihue

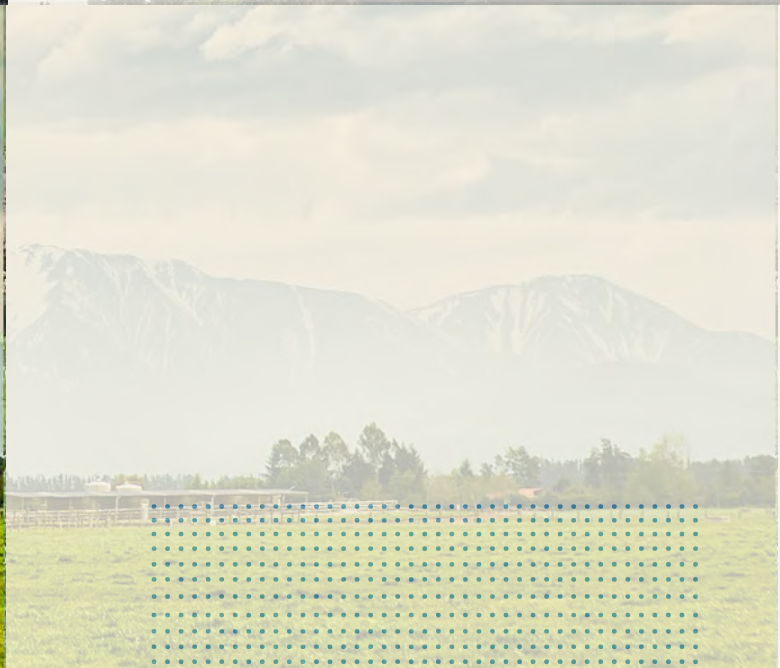

New Zealand, industrial, AHF, Central Plains Water



GLOBAL APPLICATION

Sinexcel AHF application covers Asia, Oceania, Euro, Africa, North America, South America.