


SUNLIKE

LED SOLAR STREET LIGHT




IP 66 MSDS UN38.8
LEVEL 12 WIND TEST




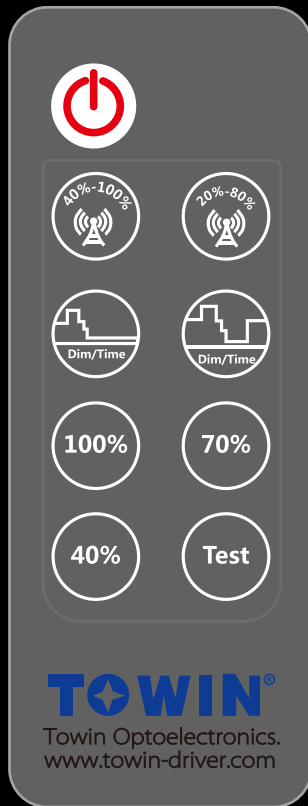


TIME CONTROL MODE

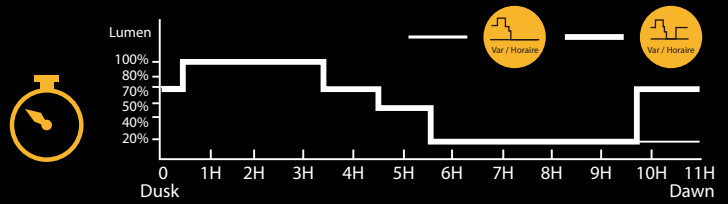

CONSTANT BRIGHTNESS MODE

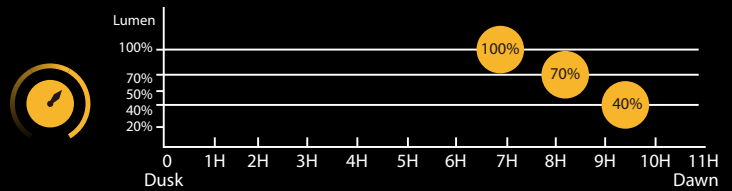

INDUCTION MODE

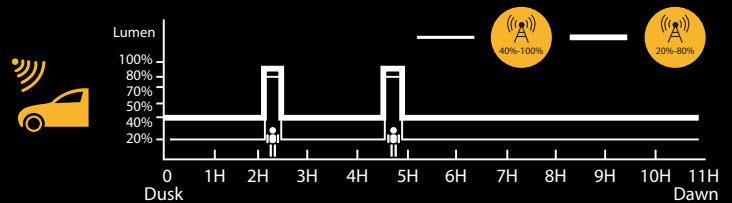


TO IMPROVE THE AUTONOMY, THE CONTROLLER WILL AUTOMATICALLY HALVE THE BRIGHTNESS ONCE THE BATTERY SOC (REMAINING CAPACITY) GOES BELOW 40%.

THE LUMINAIRE WILL AUTOMATICALLY TURN ON AND OFF ACCORDING TO AMBIANT LIGHTING CONDITIONS, REGARDLESS OF CHOSEN MODE.


PRODUCT NOMENCLATURE

EXAMPLE: TLSTC008XYZZ

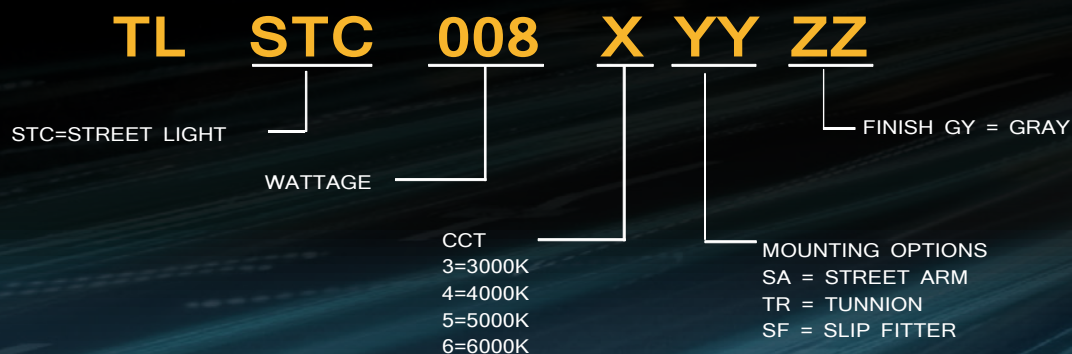



8W

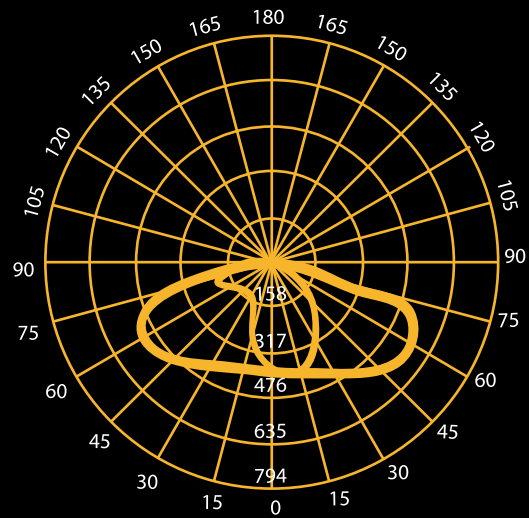


MODEL	TLSTC008XYZZ
CASING	Aluminium
DIMENSION	520x290x80mm
EFFICIENCY	200 lm/w
LUMENS	1600 lm (8w)
LED CHIP	Lumileds 5050 (215lm/w - CRI>70)
SOLAR PANEL	17Wp (Mono crystalline solar panel - 20%)
BATTERY	LiFePO4 - 9Ah 12.8V (115 Wh)
CHARGING TIME*	7 hrs
AUTONOMY AT FULL POWER	12 hrs
MAXIMUM AUTONOMY	50 hrs
OPERATION MODE	Remote control with one-key setting
WEIGHT	5.3 kg
INSTALLATION HEIGHT	2 to 4 meter
OPERATING TEMPERATURE	-20°C to +50°C

* WITH OPTIMAL CONDITIONS



20W

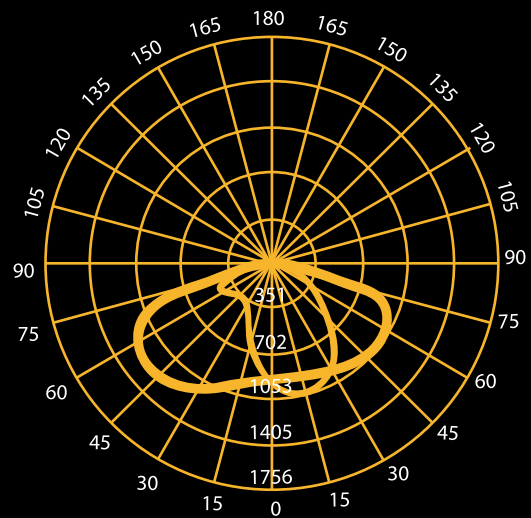


MODEL	TLSTC020XYZZ
CASING	Aluminium
DIMENSION	660x420x94mm
EFFICIENCY	200 lm/w
LUMENS	4000 lm (20w)
LED CHIP	Lumileds 5050 (215lm/w - CRI>70)
SOLAR PANEL	36Wp (Mono crystalline solar panel - 20%)
BATTERY	LiFePO4 - 20Ah 12.8V (256 Wh)
CHARGING TIME*	7 hrs
AUTONOMY AT FULL POWER	10 hrs
MAXIMUM AUTONOMY	50 hrs
OPERATION MODE	Remote control with one-key setting
WEIGHT	9.7 kg
INSTALLATION HEIGHT	3 to 5 meter
OPERATING TEMPERATURE	-20°C to +50°C

* WITH OPTIMAL CONDITIONS








30W

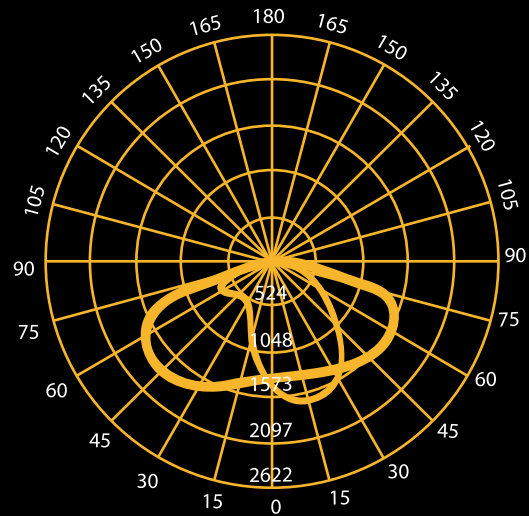


MODEL	TLSTC030XYZZ
CASING	Aluminium
DIMENSION	900x420x94mm
EFFICIENCY	200 lm/w
LUMENS	6000 lm (30w)
LED CHIP	Lumileds 5050 (215lm/w - CRI>70)
SOLAR PANEL	52Wp (Mono crystalline solar panel - 20%)
BATTERY	LiFePO4 - 30Ah 12.8V (384 Wh)
CHARGING TIME*	7 hrs
AUTONOMY AT FULL POWER	10 hrs
MAXIMUM AUTONOMY	50 hrs
OPERATION MODE	Remote control with one-key setting
WEIGHT	13.5 kg
INSTALLATION HEIGHT	3 to 6 meter
OPERATING TEMPERATURE	-20°C to +50°C

* WITH OPTIMAL CONDITIONS

VARIOUS MOUNTING ACCESSORIES

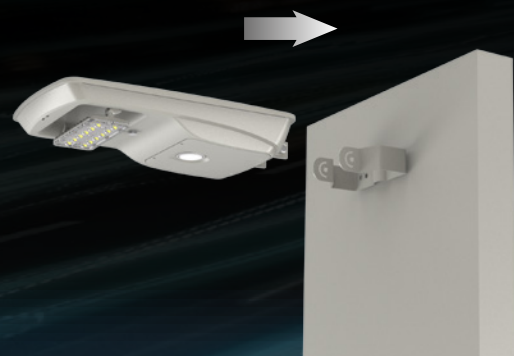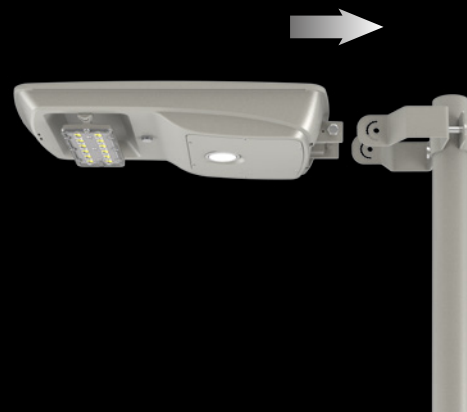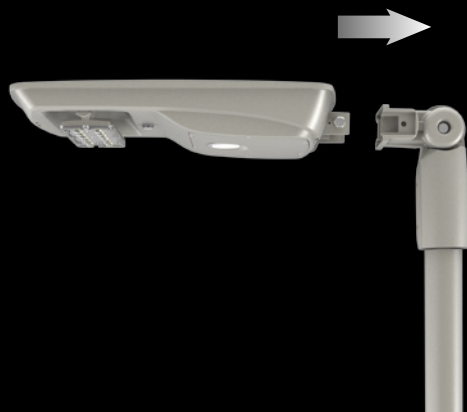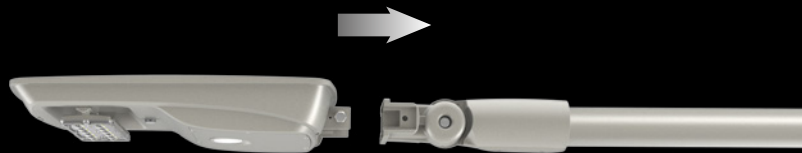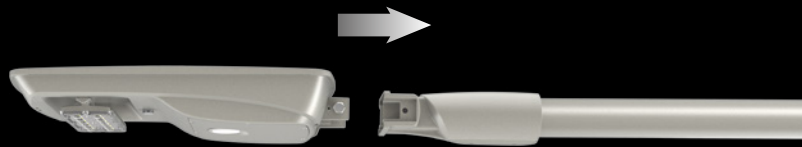

PACKING CARTON AND PEARL COTTON

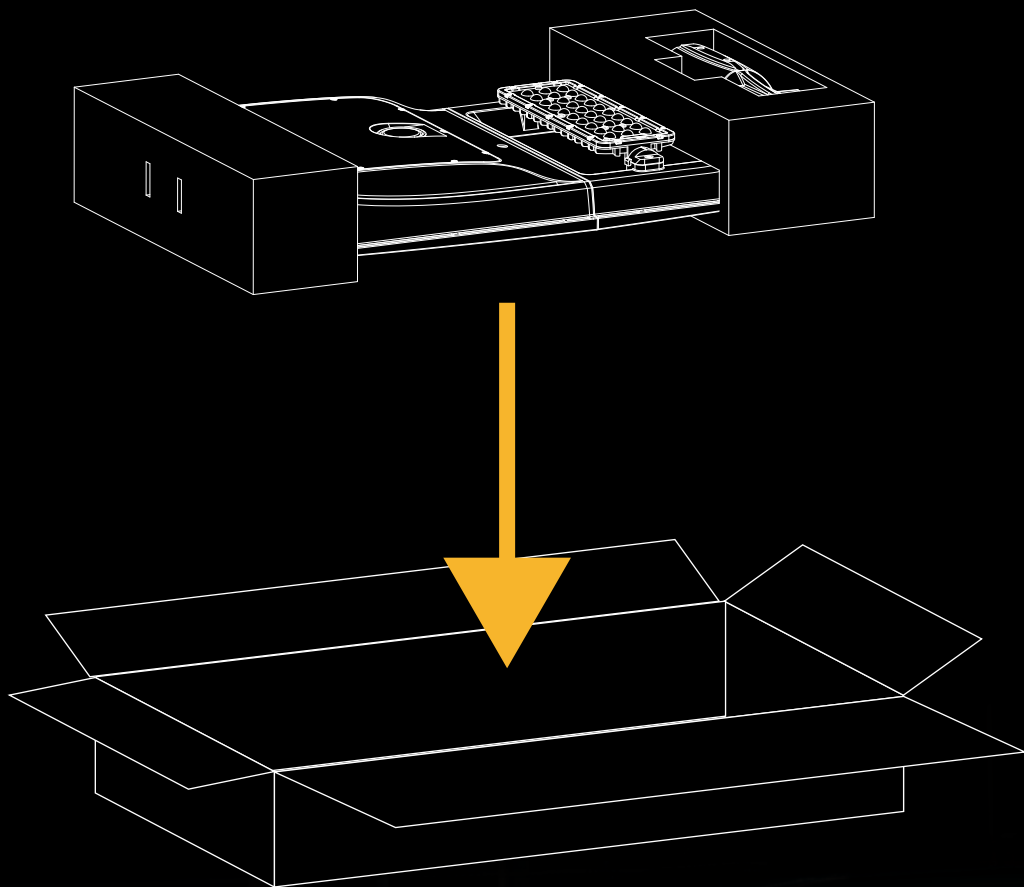

	BOX SIZE (mm)	QTY/CTN	GW (kg)	CUBIC METER (m ³)
8W	665x350x160	1	7.8	0.038
20W	825x490x165	1	13.5	0.067
30W	1070x490x165	1	17.4	0.087



OUTBEAM

ATTENTION:

1. TO AVOID DEEP DISCHARGE OF THE BATTERY DURING STORAGE, PLEASE RECHARGE THE LIGHTING FIXTURE EVERY 4 MONTHS.
2. THE AVERAGE SUNSHINE IN THE INSTALLATION AREA SHOULD BE ABOVE 3.5H/DAY IN ORDER TO ENSURE FULL FUNCTION OF THE LIGHTING FIXTURE.
3. SELECT THE RIGHT OPERATING MODE ACCORDING TO THE LOCAL LEGISLATION NEEDS AND THE LOCAL SUNSHINE CONDITIONS.
4. KEEP IT AWAY FROM SHADOWS.
5. SELF-CLEANING AVAILABLE WHEN THE LIGHT FIXTURE HAVE A MINIMUM ANGLE OF 15 DEGRESS.

